

KNAUF

HERADESIGN® Baffle Line






©Knauf Ceiling Solutions

HERADESIGN® Baffle Line is a range of high performance, wood wool acoustical Baffles, available in a variety of surfaces and dimensions.


- Baffles are available with a HERADESIGN® Fine and Superfine surface texture
- High sound absorption performance
- Three layer Baffle with HERADESIGN® cover layers and mineral wool absorbent core
- Available with a 2500mm maximum length and 200mm minimum height
Special sizes on request, depending on quantity
- Various pre assembled HERADESIGN® hangers can be selected for extra flexibility
- Framing with completely closed anodised aluminium profile and integrated cut outs for HERADESIGN® hangers
- Available in Vario Design and RAL and NCS colours for HERADESIGN® cover layers

Build on us.

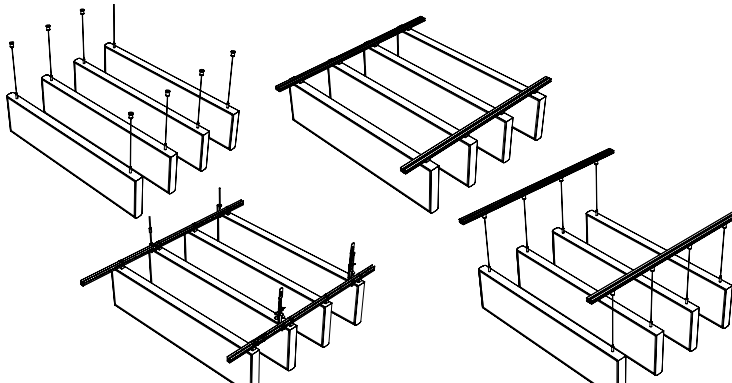Characteristics		Detailed information				
Surface		HERADESIGN® Fine, Fine A2			HERADESIGN® Superfine, Superfine A2	
Thickness (mm)		55				
Standard dimensions and weights	 	Format (mm)	Weight (kg/Baffle)			
			HERADESIGN® Fine	HERADESIGN® Fine A2	HERADESIGN® Superfine	HERADESIGN® Superfine A2
		600 x 300	4.5	6.1	4.4	5.8
		1200 x 300	8.7	12.0	8.4	11.3
		1800 x 300	12.9	17.8	12.5	16.8
		600 x 600	8.3	11.6	8.0	10.9
		1200 x 600	15.9	22.5	15.3	21.1
		1800 x 600	23.4	33.5	22.6	31.4
		Additional dimensions available on request.				
System		Hanging wire kit (with/without ceiling rail) option Short hanger kit with ceiling rail option U-Profile grouping system				
Reaction to fire		Euroclass B-s1,d0 and A2-s1,d0 according EN 13501-1				
Sound absorption		HERADESIGN® Baffle Line Fine: αw up to 0.75 / NRC up to 0.70 HERADESIGN® Baffle Line Superfine: αw up to 0.80 / NRC up to 0.75 HERADESIGN® Baffle Line Superfine A2: αw up to 0.75 / NRC up to 0.75				
Humidity resistance		Not suitable for indoor swimming pools, underground garages and outdoor areas.				
Cleanability						
Colours		            Vario Design Colours White* Nature** Black*** Granite Steel Green Marble Copper Oak Brass Sandstone Concrete *similar to RAL 9010 **similar to RAL 1015 ***similar to RAL 9005 • Other colours from popular RAL and NCS colour systems are available. • Deviations in colour and visual appearance may occur due to the rough fibre and panel surface.				
Sustainability	 FSC www.fsc.org on demand  Institut Bauen und Umwelt e.V.  BLAUER ENGEL www.blauer-engel.de/uz132  IBR Institut für Bauphysik und Raumklima  EPD EN 15804 VERIFIED  PEFC PEF C04-31-3367  SundaHus  M1 GREEN EMISSION CLASS FOR BUILDING MATERIALS  THE INDOOR CLIMATE LABEL					
					 aluminum profile on all edges	
		Three-layer Baffle with HERADESIGN® face sheets and mineral wool absorber core Enclosure with completely closed, anodized aluminum profile anodized aluminum profile (color A6/C0) and integrated recesses for HERADESIGN® hangers				

Short Hanger


Pre-assembled hanger with integrated torsion protection and easy-to-click metal clamps for suspending HERADESIGN® Baffles Element Profile from the ceiling fastening or guide rail.

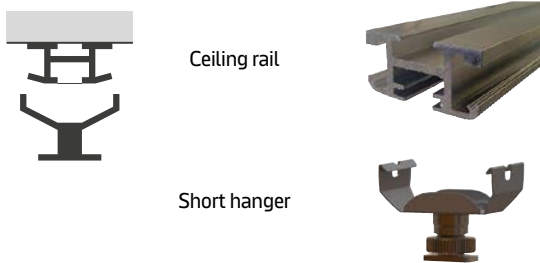

- no tools required for installation
- self-fastening
- quick and simple installation at any location
- fastest possible installation thanks to easy-to-click function
- suspension height = 42.5mm
(top edge of ceiling rail to top edge of Baffle)
- at least 2 hangers per Baffle
- max. working load per hanger 300 N/30 kg
- max. breaking strength per hanger 1500 N/150 kg

Short hanger for U-profiles (Grouping option)

Pre-assembled hanger with integrated anti-twist device and easy-to-click metal clip for suspending HERADESIGN® Baffle Element profiles from the U-profile with plug-in clip.



- completely tool-free assembly
- self-fixing
- easy and fast installation at any place
- quickest possible installation due to the easy-to-click function
- min. 2 hangers per Baffle
- max. working load per hanger 300 N/30 kg
- max. breaking load per hanger 1500 N/150 kg

Wire Hanging Kit

Pre-assembled hanger with integrated torsion protection in hanger and Baffle base for suspending HERADESIGN® BafflesElement Profile from the ceiling fastening or guide rail.




- no tools required for installation
- precise, continuous height adjustment possible
- wire Ø 1.2mm, 7 x 7 galvanized steel, length 500mm
nominal strength: 2400 N/mm²
- side wire guide
- surface of hanger and Baffle base: nickel matt
- max. suspension height = 450mm
(top edge of ceiling rail to top edge of Baffle)
- at least 2 hangers per Baffle
- max. working load per hanger 160 N/16 kg
- max. breaking strength per hanger 800 N/80 kg

Single hanger

Pre-assembled hanger with integrated anti-twist device in the hanger and Baffle base for suspending individual HERADESIGN® Baffle Element profiles to the ceiling or to suspended ceiling systems. The hanger tops are fixed into the ceiling either with suitable screws and dowels or by screwing them onto an M6 screw bolt.

Mounting note

Fastening in the substrate must be possible with millimeter accuracy for single hangers, since the absence of the ceiling rail means that there is no horizontal adjustability.

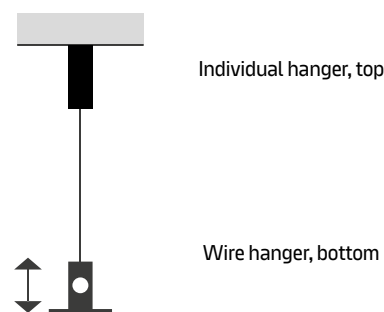

- completely tool-free assembly
- millimeter-precise and stepless height adjustment possible
- rope Ø 1.2mm, 7x 7 steel galvanized, length 500mm
nominal strength: 2400 N/mm²
- with lateral rope rejection
- surface of hanger and Baffle base: nickel matt
- max. suspension height = 450mm
(top edge of ceiling rail to top edge of Baffle)
- min. 2 hangers per Baffle
- max. working load per hanger 160 N/16 kg
- max. breaking load per hanger 800 N/80 kg

Number of hangers per Baffle

